

ELEVATOR FOR THE DISABLED



EQUIPMENT DESIGNED TO ALLOW DISABLED PEOPLE IN WHEELCHAIRS OR WITH MOTOR DIFFICULTIES TO ACCESS 3rd - 4th - 5th FLOOR.

- > Electro-welded and painted metal structure fitted on rubber wheels
- > The work basket is lowered to the ground so as to allow easy access to the operator and the wheelchair
- > Gate with electric lock and safety limit switch that ensures that it lifts only if closed
- > Operable either from the ground or from the edge of the basket
- > Dimensions 2600 x 1350 x 425 mm; 2000 mm
- > Platform Capacity 250 Kg
- > Max tilt over 12%
- > 24 VDC LV Power supply and commands
- > Integrated battery charger (230 V mains power supply)



COFFIN LIFTER TROLLEY



STANDARD






EQUIPPED WITH 4-HANDLE SEDAN CHAIR FOR EASY MOVING

Electro-galvanized steel or aluminium structure with pneumatic rubber wheels non-deformable

LOWERING DEVICES

LOWERING DEVICES MADE OF ELECTRO-GALVANIZED METAL.

- > Harness system of the crate with double nylon straps to allow for adequate support of the crates.
- > Lifting by means of manual winch with double rope

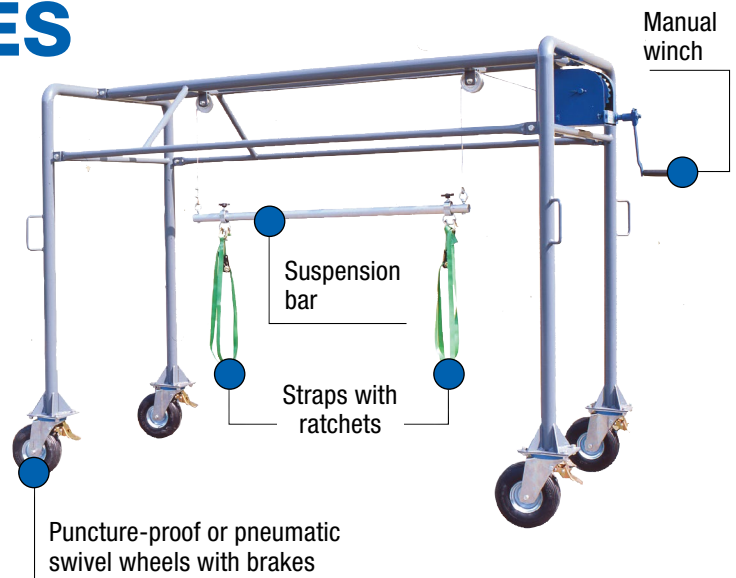

COFFIN LIFTER

AF COFFIN LIFTER



MAXIMUM OVERALL
CAPACITY 320 Kg

VERSIONS

- > Single basket
- > Manual with lifting by hydraulic pump
- > Self-propelled
- > Double basket
- > Electric with direct current motor

SINGLE BASKET



DOUBLE BASKET



FOR CHAPELS

IDEAL FOR CHAPELS
THANKS TO THE EVEN
SMALLER DIMENSIONS
COMPARED TO THE
STANDARD VERSION




CRAWLER






MADE IN ITALY ACCORDING TO THE EC DIRECTIVE MACHINE

COFFIN LIFTER



AF/S COFFIN LIFTER

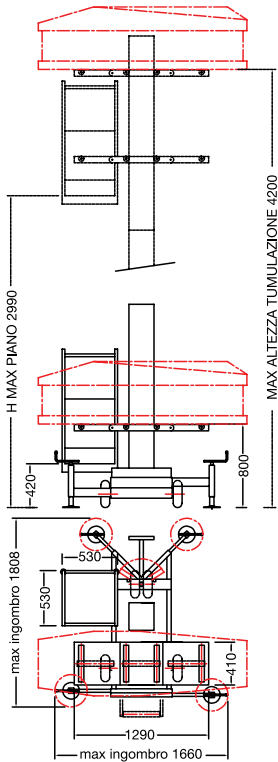



**NORMAL
VERSION**

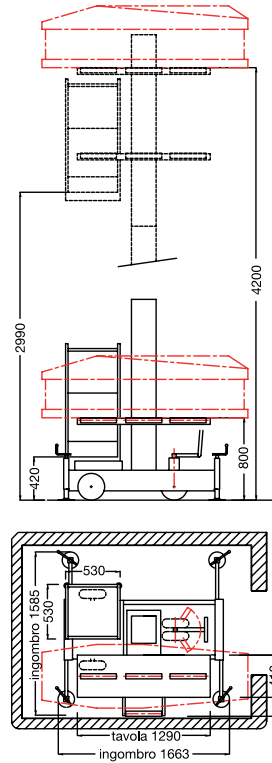

**VERSION
FOR CHAPELS**



OPTIONAL, AVAILABLE FOR ALL VERSIONS

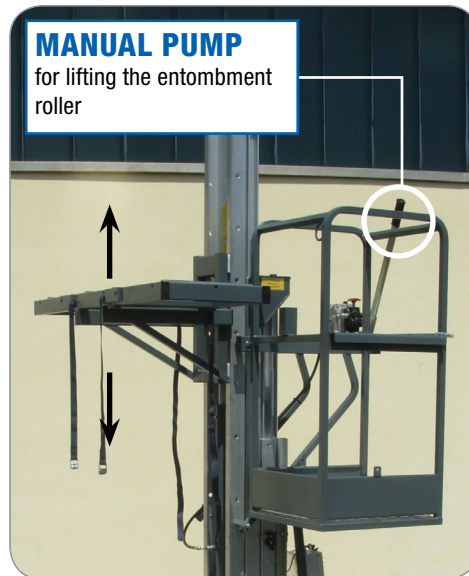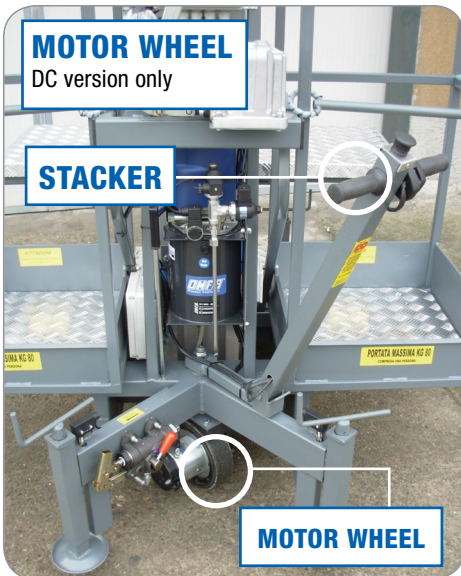

FOR INFORMATION AND TECHNICAL DATA SHEETS, CONTACT OUR OFFICES